



MAGNESIUM

Satisfy Professional's Needs



7-1/4" Circular Saw
5007MG / 5007MGA



MAGNESIUM

Less Weight yet with high rigidity





Comparison of Cutting Efficiency

Note: Numbers in the charts below are relative values when the capacity of Competitor "D" model are indexed at 100.


Blade used for tests: 185 mm (7-1/4") saw blade supplied with each model

Test material: 2 x 10" (38 x 230 mm) SPF timber
Bevel angle: 0 degree

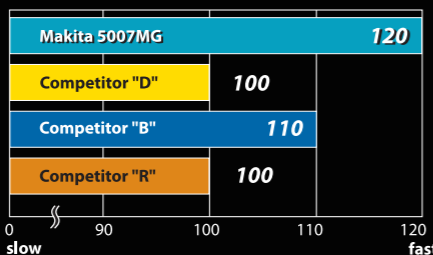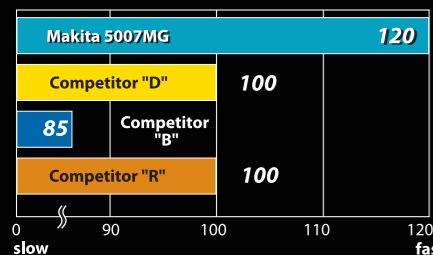

Blade used for tests: 185 mm (7-1/4") TCT saw blade (24T) supplied with Makita 5007MG

Test material: 2 x 10" (38 x 230 mm) SPF timber
Bevel angle: 45 degree

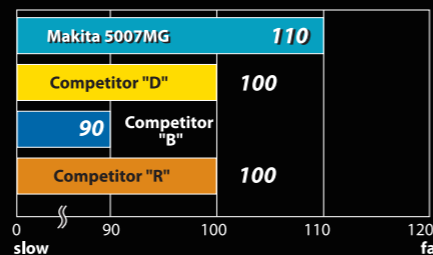

*The number of the teeth of the saw blade: 24T= Makita 5007MG, Competitor R,B 18T= Competitor D

7-1/4" Circular Saw

- Double Insulation
- Built-in Job Light
- Electric Brake (5007MGA only)
- Carrying Case



5007MG / 5007MGA 7-1/4" (185 mm) 153

Blade Diameter	7-1/4" (185 mm)
Arbor	5/8" (15.88 mm)
Maximum Cutting Capacities	at 0° degrees: 2-1/2" (63.5 mm) at 45° degrees: 1-3/4" (45 mm) at 56° degrees: 1-3/8" (35 mm)
No Load Speed	5,800 RPM
AMPS (120V)	15.0 A
Overall Length	12-1/2" (317 mm)

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca




Lightweight at Only 10.1lbs (4.6kg)

Tool weight has been reduced by using magnesium diecast for base and blade case.



Max. Cutting Depth
2-1/2"
(63.5 mm)

Deeper than competitors models

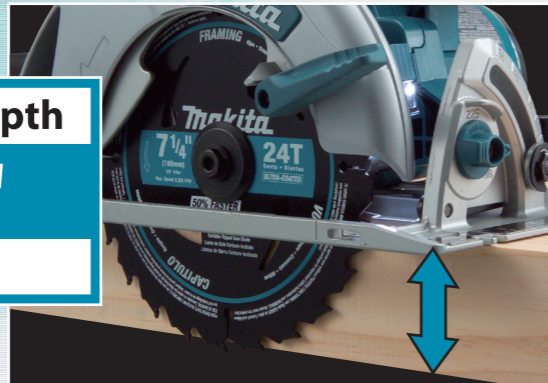

Powerful 15A Motor



Flat rear end of motor housing is convenient for replacing the saw blade.

Blower Function



The air directed from the end of the top guide blows sawdust off the cut line ahead.

Calibrated for Accurate Cut of Depth Adjustment



Easier to read than the current models

Max. Bevel Capacity
56degrees
Cutting Depth: 1-3/8"(35 mm)



Comfortable replacing the saw blade

Screw can be loosened or tightened, by either hex wrench or hex socket wrench.




Hex wrench holder

Best-fitting Rubberized Grip Non-skid with elastomer

Positive Stopper
22.5, 45, 56
degrees

Bevel Adjustment with Positive Stopper at 22.5 or 45 or 56 degrees

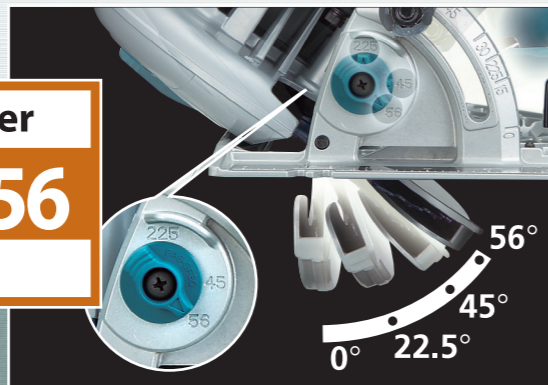

Built-in Twin LED Light
for easy cutting of workpiece in the dark place

Brightly illuminates the blade and cut line for easy cutting of workpiece in the dark place.



Magnesium Diecast

Safety Cover

designed to action smoothly

Rubberized Levers

All levers feature metal and rubber construction; operable even if the rubber breaks off.



5007MG / 5007MGA 7-1/4" (185 mm) Circular Saw