


## Excellent work efficiency

- 1) Numbers in the chart are relative values when the competitor "M" is indexed at 100.
- 2) The test results depend to a great extent on sealant type or viscosity, etc.
- 3) Tested with 330ml cartridge of "#8070 Pro" silicone sealant with 5.0mm diameter of nozzle hole.
- 4) Each test tool used the following battery as the power source:
  - Makita DCG180RFEB, DCG180ZB: 14.4V-1.3Ah Li-ion battery BL1415
  - Makita DCG180RFE, DCG180: 18V-1.3Ah Li-ion battery BL1815
  - Competitor "M": 18V-1.5Ah Li-ion battery
  - Competitor "P": 14.4V-3.3Ah Li-ion battery

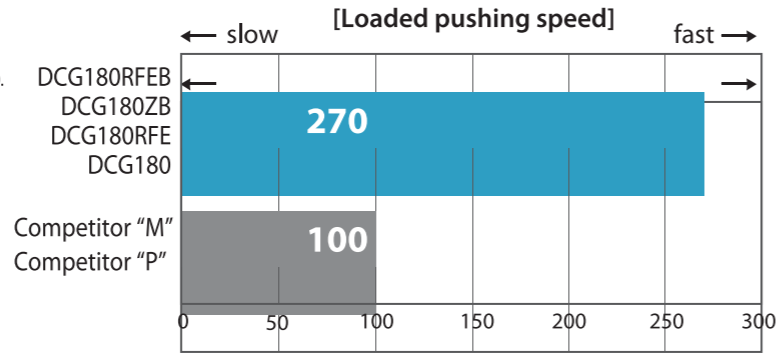

## Accessories

### Holder A set



Part No. 196351-8

### Holder B set



Part No. 196352-6

Piston A, B, C



Complete with 2 sealant holders and 3 plungers for compatibility with the following types of sealant:

	Holder A set (300ml size Holder)	Holder B set (600ml size Holder)
Compatible sealant size: mm	51.0 x 215	51.0 x 355
Compatible sealant type	Cartridge 51.0 x 215	Yes* (compatible using Piston A)
	Sausage pack 51.0 x 355	Yes* (compatible using Piston B)
	Bulk sealant	Yes (compatible using Piston C)

\* for compatibility with adhesive cartridge and sausage pack

## Battery



## Charger

DC18RC / DC18RA

Charging time (3.0Ah)  
22 minutes



DC18SF

Charging time (3.0Ah)  
1 to 2 batteries : 60 minutes  
3 to 4 batteries : 120 minutes



DC18SD

Charging time (3.0Ah)  
60 minutes



## Cordless Caulking Guns DCG180RFEB / DCG180ZB / DCG180RFE / DCG180Z

- Variable Speed
- Built-in Job Light
- Carrying Case



DCG180RFEB / DCG180ZB



DCG180RFE / DCG180Z

### DCG180RFEB / DCG180ZB

Battery Capacities: 18V Li-Ion  
Max Pushing Force: 1,100 lb (5,000 N)  
Compatible Sealant Size: 600 ml Cartridge, Sausage Pack, Bulk Sealant  
Dimensions (L x W x H): 21-1/4" x 4-1/4" x 11-1/8" (538 mm x 108 mm x 281 mm)

### DCG180RFE / DCG180Z

Battery Capacities: 18V Li-Ion  
Max Pushing Force: 1,100 lb (5,000 N)  
Compatible Sealant Size: 300 ml Cartridge  
Dimensions (L x W x H): 15-7/8" x 4-1/4" x 11-1/8" (404 mm x 108 mm x 281 mm)



## Cordless Caulking Guns

DCG180RFEB / DCG180ZB  
DCG180RFE / DCG180Z



Powered by Li-ion battery for  
More Efficient Operation with  
Reduced Hand Fatigue

with Holder A set  
(Sealant Cartridge is optional.)

Model: DCG180RFE,  
DCG180Z

Model: DCG180RFEB,  
DCG180ZB

with Holder B set

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca




## with Holder B set (600ml)



**Compact and light weight design**  
**2.5kg (5.5lbs)**

BCG180 with Holder B set and Battery BL1815


Compact body obtained by employing our unique mechanical structure

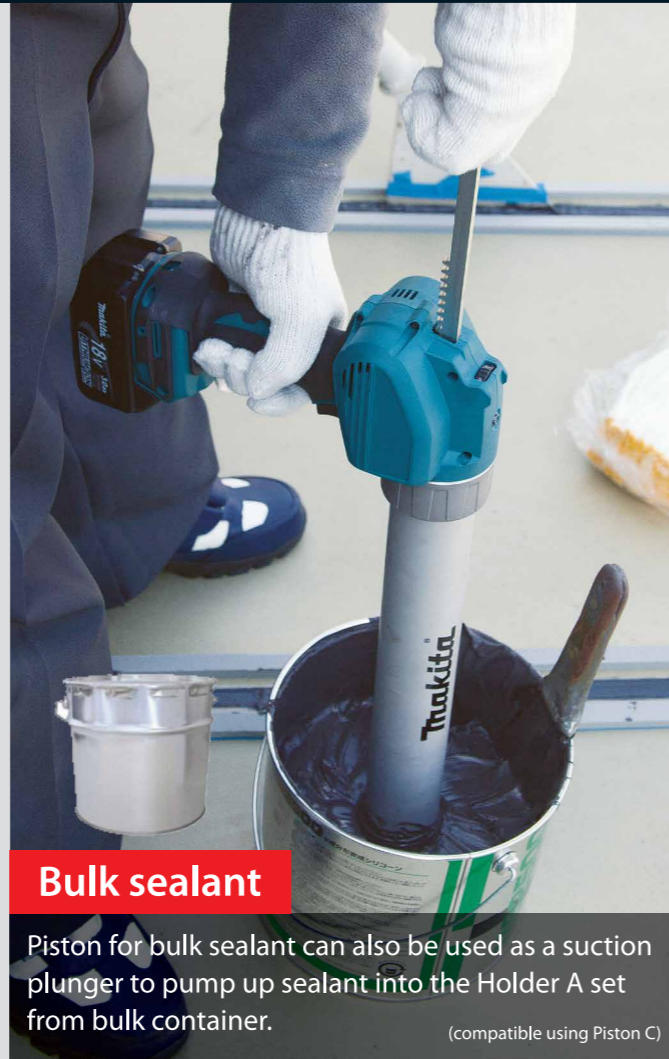

### Bulk sealant

Piston for bulk sealant can also be used as a suction plunger to pump up sealant into the Holder A set from bulk container.

(compatible using Piston C)

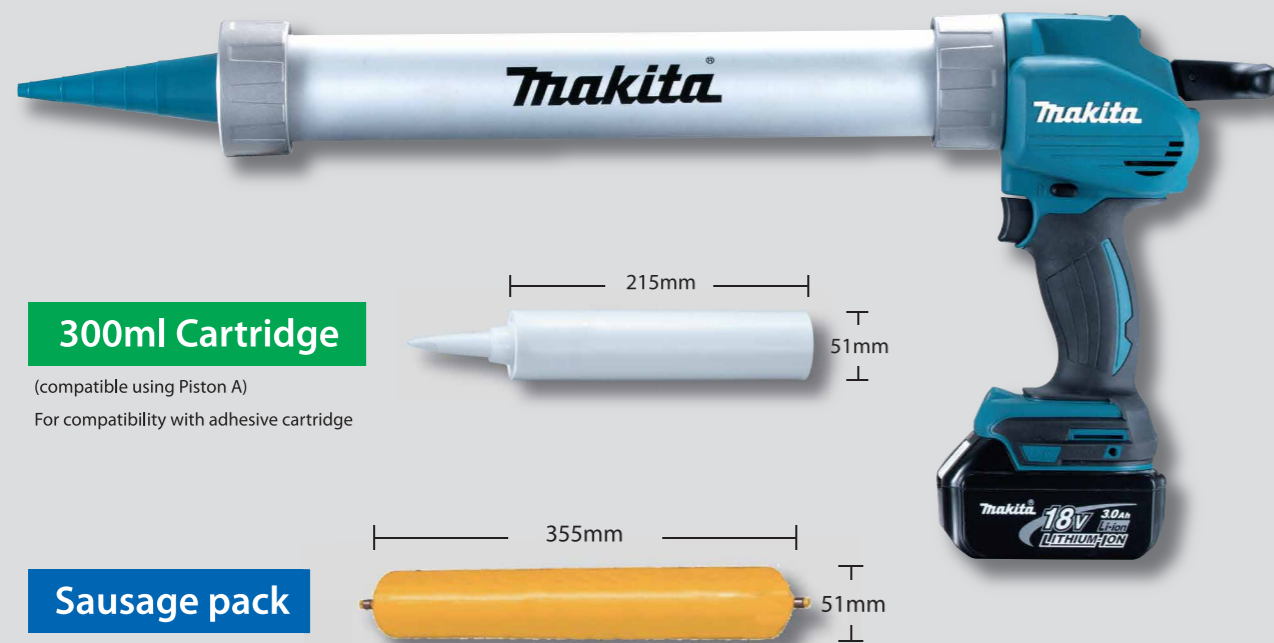

### 300ml Cartridge

(compatible using Piston A)

For compatibility with adhesive cartridge

### Sausage pack

(compatible using Piston B)

For compatibility with adhesive sausage pack

Sealants are optional. Photo: DCG180RFE, DCG180ZB

## with Holder A set (300ml)



### 300ml Cartridge

For compatibility with adhesive cartridge



**Compact and light weight design**  
**2.1kg (4.7lbs)**

BCG180 with Holder A set and Battery BL1815

Compact body obtained by employing our unique mechanical structure

Photo: DCG180RFE, DCG180Z

## Variable speed control for maximum control of sealant flow rate

### Speed control dial

enables to set maximum pushing speed for optimum sealant flow rate to match the material of workpiece or the width of the gap to caulk.



### LED job light

with pre-glow and afterglow functions



### Variable speed trigger switch

allows for fine adjustment of pushing speed for controlled sealant flow rate at startup and around the corner.



### Anti-drip function

stops excess sealant from oozing out just upon release of the switch trigger by removing the residual pressure inside of sealant cartridge/holder.

### Soft grip

provides comfortable grip and better control.

## 360 degree rotating sealant holder

Even in caulking hard to reach places, you can avoid awkward working postures by simply rotating sealant holder so that the angle of the cartridge nozzle fits over the gap to caulk.



## Overload indication lamp

Single LED light indicates how heavily the machine is loaded for preventing breakage of the sealant cartridge as follows:

- Blinking/ The machine is nearly overloaded.
- Solid/ The machine is overloaded; the overload circuit will shut off the power.

