



18V LXT Wheelbarrows
DCU180ZX1 / DCU180ZX2



Powered by LXT 18V battery

Battery box is able to hold two selectable batteries



Carries all types of heavy loads with choice of **Flat Dolly** or **Bucket**

Li-ion Battery, Charging Time Chart (approx): min.

| 18V LITHIUM-ION | BL1815N 1.5Ah | BL1830B 3.0Ah | BL1840B 4.0Ah | BL1850B 5.0Ah | BL1860B 6.0Ah |
|------------------------------------|------------------|------------------|------------------|------------------|------------------|
| DC18RC | 15 min | 22 min | 36 min | 45 min | 55 min |
| Two port multi Fast Charger DC18RD | | | | | |
| DC18SD | 30 min | 60 min | 90 min | 110 min | 130 min |




Flat Dolly



Bucket

can load sand, gravel, powder etc.



Easy to dump



18V LXT Wheelbarrows DCU180ZX1 / DCU180ZX2

| | |
|---|--|
| <ul style="list-style-type: none"> Variable Speed Reversing Electronic 2-Speed Constant Speed Soft Start Built-in Job Light | <p>DCU180ZX1 (with Flat Dolly)</p> <p>Battery Capacities: Two 18V Li-Ion</p> <p>Max Speed: Forward, High / Low: 0 - 3.5 km/h / 0 - 1.5 km/h Reverse: 0 - 1.0 km/h</p> <p>Max Turning Radius: 1,075 mm (Outer diameter when turning with front wheel as axis)</p> <p>Max Climbing Capacity: 12°</p> <p>Overall Dimensions during operation (L x W x H): 61-1/2" x 41-3/4" x 35-1/2" (1,560 mm x 1,060 mm x 900 mm)</p> <p>Standard Equipment: Tool Only. Batteries and Charger Sold Separately. Flat Dolly (199116-7)</p> <hr/> <p>DCU180ZX2 (with Bucket)</p> <p>Battery Capacities: Two 18V Li-Ion</p> <p>Max Speed: Forward, High / Low: 0 - 3.5 km/h / 0 - 1.5 km/h Reverse: 0 - 1.0 km/h</p> <p>Max Turning Radius: 1,075 mm (Outer diameter when turning with front wheel as axis)</p> <p>Max Climbing Capacity: 12°</p> <p>Max Load Capacity: 287 lbs (130 kg)</p> <p>Overall Dimensions during operation (L x W x H): 51-1/2" x 31-1/8" x 35-1/2" (1,310 mm x 790 mm x 900 mm)</p> <p>Standard Equipment: Tool Only. Batteries and Charger Sold Separately. Bucket (198494-2)</p> |
|---|--|

When QUALITY & SERVICE COUNTS
Choose Makita

makita.ca

No Exhaust Gas, Low Vibration, Low Noise

Ideal for use at urban construction sites and farms



Variable 2-speed & reverse design for optimum speed control and small radius turn

Constant speed control automatically applies additional power to the motor to maintain speed under load

Maximum loading capacity

287 lbs


able to move heavy loads with no back pain

Maximum climbing angle

12°

Brake lever with locking mechanism

prevents accidental start on a slope. (Front wheel)

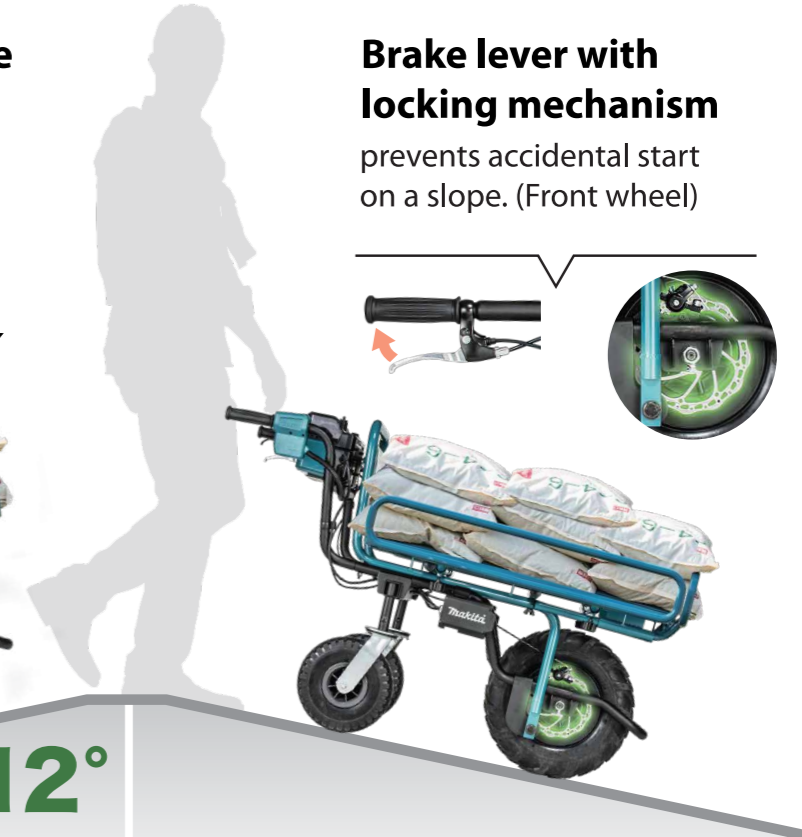

Battery box is able to hold two selectable batteries



Battery cartridge can be selected with the battery selection switch

All switch positions within easy reach and simple to use



Lock key

Dual LED job lights



Detachable Rear wheel

After removing rear wheels and installing Foot (left / right), the cart can be used as a unicycle.



Foldable handle



XPT
EXTREME PROTECTION TECHNOLOGY

washable with tap water (High pressure washer cannot be used.)

