



# 1/4" Cordless Drywall Screwdriver DFS451RFE / DFS451Z



**LXT**  
LITHIUM-ION

**18V**  
LITHIUM-ION

# Well balanced tool design for easy handling and maneuverability



## Best possible tool body for screwdriving

- ergonomically designed to;
- minimize hand fatigue and pain even in long continuous operation.
  - give maximum power thrust.
  - allow for much smoother and easier trigger pull.
  - provide comfortable grip and better control with enlarged non-slip elastomer.

### One-touch locator

allows for easy locator installation/ removal with a single action.

### Variable speed control switch

provides easier operation for fine adjustment of screw depth without locator.



### LED job light

- with afterglow function
- convenient for operation in dark job sites
  - keeps on illuminating about 12-13 seconds after trigger release.

### Silent clutch


- High durability
- Direct drive in reverse rotation enables to remove screws without dismantling locator for higher productivity.



## Comparison of Efficiency

Drove 25 mm drywall screws through a 12.5 mm thick plasterboard into SPF timber.

Note: 1. The test results depend to a great extent on the hardness of the material, etc.  
2. Numbers in the charts below are relative values when the capacities of Competitor "H" are indexed at 100.

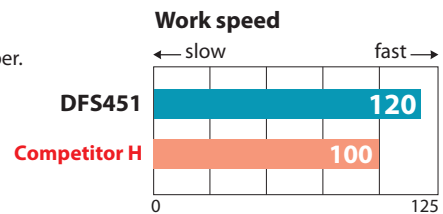

## Accessories

### 18V battery

- Higher capacity**  
BL1830: 3.0 Ah  
**Lightweight**  
BL1815: 1.3 Ah



### 14.4V battery

- Higher capacity**  
BL1430: 3.0 Ah



### Fast Charger

- DC18RA  
Charging time  
3.0 Ah - 22min.  
1.3 Ah - 15min.



### Fast Charger

- DC18RC  
Charging time  
3.0 Ah - 22min.  
1.3 Ah - 15min.



### Charger

- DC18SD  
Charging time  
3.0 Ah - 60min.  
1.3 Ah - 30min.



### Phillips insert bit

- Ph 2-25: Part No. 798398-4  
Ph 3-25: Part No. 798314-6



### Magnetic bit holder

- Type MZ (For insert bit)  
6.35-60 : Part No. 784811-8  
6.35-76 : Part No. 784801-1



### Locator assembly

- Short : Part No. 195602-6  
Long : Part No. 195542-8



## 1/4" Cordless Drywall Screwdriver

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case



## DFS451RFE / DFS451Z

440

<b>Battery Capacities</b>	18V Li-Ion
<b>Hex Shank</b>	1/4" Hex
<b>No Load Speed</b>	0 - 4,000 RPM
<b>Overall Length</b>	11-1/8" (281 mm)
<b>Net Weight</b>	3.7 lbs. (1.7 kg)

**DFS451Z Standard Equipment:  
Tool Only. Batteries and Charger  
Sold Separately.** Hook (346449-3),  
2 Ea. Phillips Bit 2-25 (784211-2),  
Magnetic Bit Holder (784801-1),  
Locator (197024-6)

**DFS451RFE Standard Equipment: Two 18V (3.0 Ah) Li-Ion Batteries** BL1830 (194205-3),  
Charger (DC18RC), Hook (346449-3), 2 Ea. Phillips Bit 2-25 (784211-2), Magnetic Bit Holder  
(784801-1), Locator (197024-6), Plastic Carrying Case (824978-1)

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca