



18V
Lithium-ion

**EXPAND YOUR
LITHIUM LINE UP**

Battery & Charger Time Reference Chart (in Minutes)

	DC18RC / DC18RA	DC18SF	DC18SD	DC18SE (Automotive)
BL1840 4.0Ah	36min. Fast Charging	90min. 180min.	1 to 2 batteries 3 to 4 batteries	90min.
BL1830 3.0Ah	22min. Fast Charging	60min. 120min.	1 to 2 batteries 3 to 4 batteries	60min.
BL1815N 1.5Ah	15min. Fast Charging	30min. 60min.	1 to 2 batteries 3 to 4 batteries	30min.

Dust cup set

For Model DHR263
Use with Grip base set
Part No. 194582-3



Part No.

194580-7

Cordless Combination Hammer

DHR264Z / DHR263PF2 / DHR263Z 1" (26 mm) Adapted for SDS-PLUS bits

442

- Variable Speed
- Reversing
- SDS-PLUS Shank
- Torque Limiter
- Dust Collecting
- Built-in Job Light
- Carrying Case

	DHR264Z	DHR263PF2 / DHR263Z
Battery Capacities	Two 18V Li-Ion Concrete: 1" (26 mm) Steel: 1/2" (13 mm) Wood: 1-1/4" (32 mm) 0 - 1,250 RPM	Two 18V Li-Ion Concrete: 1" (26 mm) Steel: 1/2" (13 mm) Wood: 1-1/4" (32 mm) 0 - 1,250 RPM
No Load Speed	0 - 5,000 BPM	0 - 5,000 BPM
Blows Per Minute	2.5 J (1.8 ft. lbs)	2.5 J (1.8 ft. lbs)
Impact Energy	14-3/4" (374 mm)	13-3/4" (363 mm)
Overall Length		



Cordless Rotary Hammers 1" (26 mm)
DHR264 / DHR263PF2 / DHR263Z

Quick Change
Drill Chuck

Satisfy Professional's Needs



Adapted for
SDS-PLUS bits



18v + 18v → 36v

**Powered by two 18V Li-ion
batteries in series**



Photo : DHR263
Tool does not come with bit.

makita.ca
When QUALITY & SERVICE COUNT – Choose Makita

Outstanding Performance and Compact Design


Photo : DHR263
Tool does not come with bit.

Anti-slip soft grip
Reverse switch operable by one hand



One touch slide chuck adapted for SDS-PLUS bit

40 different bit-angle settings



Elastomer for front guard



Dust cup (option)
can be attached using adapter. (for DHR263 only)

Photo : DHR263
Tool does not come with bit.




18V + 18V → 36V

Powered by two 18V Li-ion batteries in series

Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC motor drive system.

The compatible batteries are: 1.5Ah BL1815N, 3.0Ah BL1830, 4.0Ah BL1840.

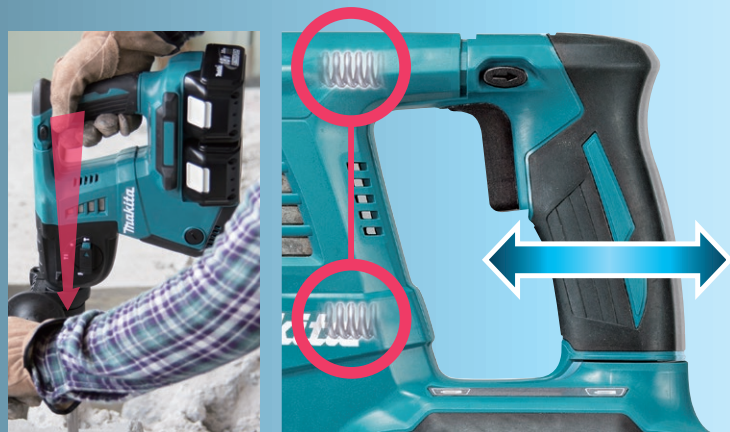

Vibration absorbing handle provides comfortable operation.

- ergonomically designed to:
- give maximum power thrust.
 - provide a sure and comfortable grip.



Quick change chuck

(for DHR264 only)



3 mode operation

- Rotation only
- Rotation + Hammering
- Hammering only

Battery capacity warning lamp



- When remaining battery capacity decreases below a certain limit, the motor automatically stops and solid red light reminds you to replace battery.
- One warning lamp for each individual battery

LED job light

- with preglow and afterglow functions
- On pulling switch trigger, the light automatically turns on before motor starts turning.
 - keeps on illuminating about 12-13 sec. after trigger release.

Extreme Protection Technology

For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced.

