



7-1/2" Cordless Dual Sliding Compound Mitre Saw with Brushless Motor
DLS714Z 7-1/2" (190 mm)



Powered by two 18V Li-ion batteries in series

	45° Bevel Cut at 45° left	Cross Cut	5° right
Miter at 0° With a 20mm(3/4") auxiliary wood fence	45x265 (1-3/4" x 10-3/8") 40 x 300 mm (1-9/16" x 11-3/4")	60x265 (2-3/8" x 10-3/8") 52 x 300 mm (2-1/16" x 11-3/4")	40 x 300 mm (1-9/16" x 11-3/4")
Miter at 45° With a 15mm(3/5") auxiliary wood fence	45x185 (1-3/4" x 7-1/4") 40 x 212 mm (1-9/16" x 8-3/8")	60x185 (2-3/8" x 7-1/4") 52 x 212 mm (2-1/16" x 8-3/8")	-
Miter at 57° With a 10mm(3/8") auxiliary wood fence	-	60x145 (2-3/8" x 5-3/4") 52 x 163 mm (2-1/16" x 6-3/8")	-


Accessories

- Fast Charger DC18RC
- Charger DC18SD
- Fast Charger DC18RD
Two Port Multi Fast Charger



TCT Saw Blade
Blade dia. 190mm
Hole dia. 20mm

Tip (mm)	Hook angle (dig)	No. teeth	Part No.
2.2	5	24	B-03850
2.0	-5	24	B-03866
2.0	10	40	A-86751
2.0	5	60	B-04008
2.0	-5	60	B-03981
2.0	10	72	A-86359



7-1/2" Cordless Dual Sliding Compound Mitre Saw DLS714Z 7-1/2" (190 mm) 441

- Brake
- Bevel Cutting L45 R5
- Dust Collecting
- Soft start



Battery	Two 18V Li-Ion
Blade Diameter	7-1/2" (190 mm)
Arbor	5/8" (15.88 mm)
No Load Speed	5,700 RPM
Overall Dimensions (L x W x H)	25-3/4" x 17" x 17-1/2" (655 mm x 430 mm x 445 mm)
Net Weight	26.3 lbs (11.9 kg)

Standard Equipment: Tool Only. Batteries and Charger Sold Separately. 7-1/2" C.T. Blade 40T (A-90629), Dust Bag (122852-0), Hex Wrench 5 (783203-8), Triangle Rule (762001-3), Vertical Vice (122571-8), 2 Ea. Holders (322312-4)



Batteries Sold Separately

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca

High power delivered by 36V (18Vx2)
 DC Brushless motor enables to cut as fast as if you were using a corded slide compound mitre saw.





Powered by two 18V Li-ion batteries in series

Two 18V Li-ion batteries can be directly installed on the machine to supply energy to the powerful 36V DC Brushless motor drive system.



Compatible batteries



BL1850B

with Battery fuel gauge

BL1850B : 5.0 Ah
BL1840B : 4.0 Ah

BL1850 : 5.0 Ah
BL1840 : 4.0 Ah
BL1830 : 3.0 Ah
BL1815N : 1.5 Ah

Max cutting capacity 52 mm X 300 mm




BL
MOTOR

LED indicator panel for 2 indications

The power remaining in the battery can be indicated in 3 stages:

- 3 solid red LEDs: more than 50% of full battery capacity
- 2 solid red LEDs: 20 to 50% of full battery capacity
- 1 solid red LED: less than 20% of full battery capacity



3 Red LEDs



Green LED



Automatic speed control

automatically changes the cutting speed according to load condition for an optimum operation:

- On light duty: high speed rotation mode
- On heavy duty: high torque mode

Dust Collecting



Vacuum Cleaner is option
(Model: DVC350)




Soft elastomer carrying grip

provides sure but comfortable grip for easy job site portability.

Soft start
minimizes start-up shock and makes the tool start smoothly.

Electric brake
stops the blade gently but fast, allowing user to quickly resume operation.

Bevel angle

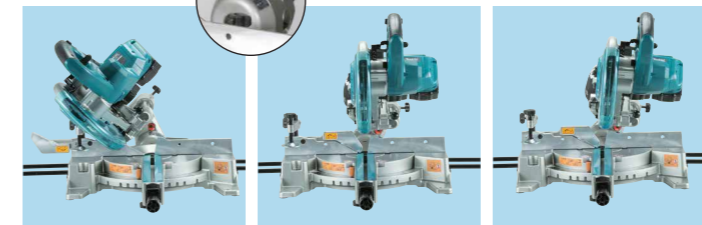


45° left

0°

5° right

Miter angle

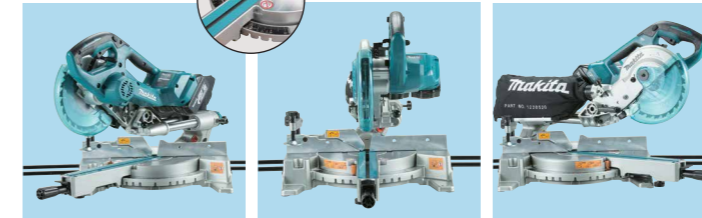

47° left

0°

57° right

