

Easy-to-Customize

Trimmer base assembly with Square base plate



Convenient for cutting workpiece using guide rule, auxiliary wood fence

Offset base plate with Grip assembly



Convenient for cutting wide workpiece

Plunge base assembly with Side grip



Convenient for cutting while holding weight on one of the two handles of the base

Trimmer base with Grip attachment set



Convenient for trimming while holding two handles of the Trimmer base

Trimmer base assembly with Straight guide



Trimmer base assembly with Trimmer guide assembly



Plunge base assembly with Guide rail adapter set, Guide rail & Clamp set




Collet cone

Size	Part No.
3/8"	763619-3
1/4"	763637-1


Base plate

	Part No.
Trimmer base plate	454842-8
Plunge base plate	450819-1
Tilt base plate	413150-6
Offset base plate	413148-3

Plunge base assembly with Straight guide & Dust nozzle

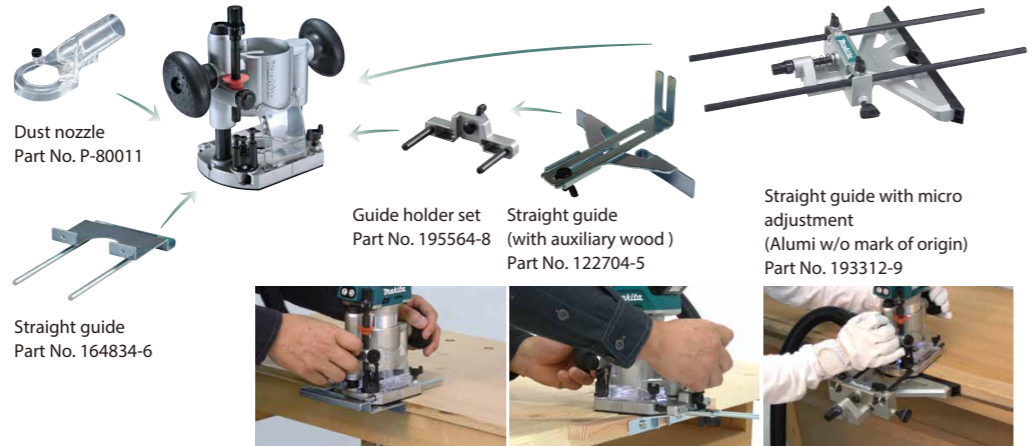

Templet guide

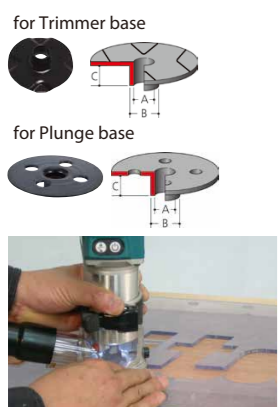

A(mm)	B(mm)	C(mm)	Part No.
for Trimmer base			
8	10	9.5	343577-5
for Plunge base			
7.7	9.5	11.5	164379-4
9	11	13	164775-6
11	12.7	13	164776-4
14.5	16	13	193043-0
18	20	13	164393-0
24	27	13	164470-8
25	29	15	163080-8
27	30	13	164471-6
37	40	13	164472-4

Cordless Trimmer DRT50

- Variable Speed
- Constant Speed
- Soft Start
- Dust Collection
- Built-in Job Light
- Carrying Case (DRT50ZJX6 Only)

Battery Capacities: 18V Li-Ion
Collet Capacity: 1/4", 3/8" (6.35 mm, 9.53 mm)
No Load Speed: 10,000 - 30,000 RPM
Overall Height: 8-7/8" (226 mm)

DRT50ZX4 Standard Equipment: Tool Only. Batteries and Charger Sold Separately. 1/4" Collet Cone (763637-1), 3/8" Collet Cone (763619-3), Trimmer Guide (122703-7), Template Guide 10 (343577-5), Wrench 13 (781039-9), Wrench 22 (781011-1), Dust Nozzle Set (195559-1)

DRT50ZJX6 Standard Equipment: Tool Only. Batteries and Charger Sold Separately. 1/4" Collet Cone (763637-1), 3/8" Collet Cone (763619-3), Trimmer Guide (122703-7), Straight Guide (122965-7), Template Guide 10 (343577-5), Template Guide 16 (193043-0), Wrench 13 (781039-9), Wrench 22 (781011-1), Plunge Base Set (196094-2), Guide Holder Set (195564-8), Offset Base Set (196093-4), Dust Nozzle Set-Plunge Base (P-80011), Dust Nozzle Set (195559-1), Side Handle (153489-2), Interlocking Case (197213-3)

Makita Cordless Trimmer DRT50

Cordless for easy maneuverability and 4 different bases for added versatility

4
different bases



When QUALITY & SERVICE COUNTS - Choose Makita

makita.ca



Cordless for easy maneuverability

18V LITHIUM-ION
Powered by LXT 18V Li-ion batteries

BL motor delivers the power and performance for corded demands

BL MOTOR

High durability and accuracy obtained by using aluminum for body housing

Accepts 1/4" & 3/8" collets



Push button switch

Lock/unlock button

On/off switch button

Variable speed control by dial

Shaft lock, Flat-top design and Horizontally installed power supply cord provides stability for easier bit change.

Dual LED job lights illuminate cutting edge and increase visibility



Available in various combinations for added versatility



with Trimmer base

Round base for smooth and fast cutting with easy handling



Enlarged opening section of base assembly for excellent bit visibility while maintaining durability.

Non-slip elastomer-covered body grip for increased operator comfort.

Precision cutting depth adjustment

Simple and efficient base lock system

High durability and accuracy obtained by using aluminum for trimmer base

Replaceable, non-marring plastic base plate for protection of trimmer base and smooth sliding on work surface



with Plunge base (option)

Precision cutting depth adjustment
Plunge capacity: 0 - 35mm (0 - 1-3/8")



Ergonomically contoured knob style handles



Optional Fine adjusting straight guide can be used.

Easy-to-operate lock lever

Rubberized soft grip

3 stage cut depth adjustment


High durability and accuracy obtained by using aluminum for plunge base

Replaceable, non-marring plastic base plate for protection of plunge base and smooth sliding on work surface



with Tilt base (option)

Ergonomic body grip easy-to-grasp with one hand
Tilting capacity: -30° to 45°



Enlarged opening section of base assembly for excellent bit visibility.

Non-slip elastomer-covered body grip for increased operator comfort.

Precision cutting depth adjustment

Simple and efficient base lock system

High durability and accuracy obtained by using aluminum for base holder

Replaceable, non-marring plastic base plate for protection of plunge base and smooth sliding on work surface



with Offset base (option)

Able to trim close to wall and tight corners with a bit set in offset position.



Able to cut close to a wall or corner-18.5mm at closest

Non-slip elastomer-covered body grip for increased operator comfort.

Simple and efficient base lock system

High durability and accuracy obtained by using aluminum for offset base

Replaceable, non-marring plastic base plate for protection of trimmer base and smooth sliding on work surface

