

Dust-free work with MAKITA Dust Collection System

WITHOUT Dust Cup and Vacuum Cleaner



- Overhead application: Dust and debris falling on operator's face are disturbing.
- Vertical application: Debris may damage floor surface.
- Downward application: Troublesome cleaning is required to wipe dust and debris away from drilled hole surrounding.



Dust Cup (Option)



Connectable with the hose of Makita vacuum cleaner without joint parts

WITH Dust Cup and Vacuum Cleaner



- Dust cup collects falling dust and debris to protect operator's face.
- With Vacuum cleaner, this dust cup can efficiently extract dust and debris in a wide range of drilling operations; from overhead to vertical downward applications.
- Higher visibility of the bit tip obtained by transparent cup mouth



1" Rotary Hammer with Sky Hook

HR2641 26mm (1") Adapted for SDS-PLUS bits

419

- Double Insulation
- Variable Speed
- Reversing
- SDS-PLUS Shank
- Torque Limiter
- Dust Collecting
- Carrying Case



Bit Type	SDS-PLUS
Maximum Capacities	Concrete: 1" (26 mm) Steel: 1/2" (13 mm) Wood: 1-1/4" (32 mm)
No Load Speed	0 - 1,100 RPM
Blows Per Minute	0 - 4,500 BPM
Impact Energy	2.9 J (2.1 ft. lbs)
AMPS (120V)	8.0 A
Overall Length	16-5/8" (422 mm)
Net Weight	6.8 lbs (3.1 kg)

Standard Equipment : Side Handle (122878-2), Depth Gauge (331886-4), Plastic Carrying Case (824695-3)



1" Rotary Hammer with Sky Hook HR2641 26mm (1")

Satisfy Professional's Needs



SDS-PLUS Shank

Extremely low vibration
achieved by Anti-Vibration
Technology.



Extra Comfort
with
AVT
ANTI VIBRATION TECHNOLOGY

(Tool does not come with bit.)

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca

AVT

ANTI VIBRATION TECHNOLOGY

Extremely low vibration achieved by ...


1 Damper spring




absorbs reaction force caused by drill bit at the moment of impact.




2 Counterweight mechanism



dampens the vibration produced by impact mechanism by moving a counterweight in the opposite direction to the movement of the piston.

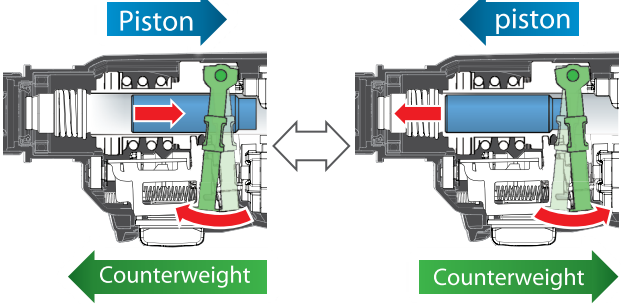

Operation mode change lever
positioned on the bottom of gear housing for reduced possibility of breakage

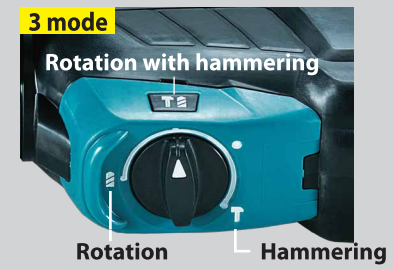

Rotation with hammering



Hammering




Rotation (Drill Chuck is option)

Easy depth adjustment
Depth gauge can be adjusted with a single motion.



One-touch sliding chuck
for easy bit changes




40 Different bit-angle settings
The bit-angle is adjustable without chisel adapter.

Dust cup (Option)
is suited for interior or overhead drilling where dust exposure must be avoided.



Minimum bit wobbling
with longer bit guide

Competitor B : 38.5mm
Competitor H : 36mm



Easy-to-grip handle
ergonomically designed to give maximum power thrust



Rubberized soft grip
provides more comfort and control.

Retractable sky hook
allows to hang the machine on ladder rungs or guard rails of aerial work platform.

