








Max. cutting capacity (height x width)



Cross Cut	Miter Cut (left & right)	Bevel Cut (left & right)	Compound Cut	Crown molding, 45 degree type	Baseboard (Skirt board)
					
2-11/16" x 12-1/4" 3-5/8" x 11"	45° left 1-5/8" x 12-1/4" 2-1/4" x 11"	45° left/right 2-11/16" x 8-5/8" 3-5/8" x 7-3/4"	Bevel 45° left 1-5/8" x 8-5/8" Miter 45° left/right 2-1/4" x 7-3/4"	Upright cutting 6-5/8"	Upright cutting 5-1/4"
	45° right 1-1/8" x 12" 1-11/16" x 11"		Bevel 45° right 1-1/8" x 8-1/2" Miter 45° left/right 1-11/16" x 7-3/4"	Horizontal cutting 9-3/4"	Horizontal cutting 12"

Accessories

Vertical vise assembly
Part No. 126617-2



Dust bag assembly
Part No. 122852-0



Stand
Part No. WST06



Horizontal vise assembly
Part No. 122470-4



Stand
Part No. 194061-1



Stand
Part No. WST05









Crown molding stopper set
Part No. 192628-9



10" Sliding Compound Mitre Saws

LS1019, LS1019L 10" (255 mm)

-  Double Insulation
-  Constant Speed
-  Soft Start
-  Brake
-  Bevel Cutting 45 LR
-  Dust Collection



Blade Diameter	10" (255 mm)
Arbor	5/8" (15.88 mm)
No Load Speed	3,200 RPM
AMPS (120V)	15.0 A
Overall Dimensions (L x W x H)	31-3/4" x 25" x 26" (805 mm x 644 mm x 660 mm)

Standard Equipment: 10" C.T. Blade 60T (A-93675), Hex Wrench 6 (781044-6), Dust Bag (122852-0), Vertical Vise (126617-2), Triangle Rule (762001-3), Dust Nozzle (123980-4), Two Holders (326978-2), Wrench Holder (416536-3)

DXT
Deep and Exact Cutting Technology

Makita 10" Sliding Compound Mitre Saws
LS1019 / LS1019L



Single sliding system enables smooth operation to produce superior cuts

When QUALITY & SERVICE COUNTS – Choose Makita
makita.ca



High precision cutting



One-touch Sliding lock
can be easily done by removing/ inserting the lock pin.

Independent laser switch (LS1019L only)



Excellent sliding durability of safety cover

Front knob for easy bevel angle adjustment


Integrated guide fences

DXT

Diameter of slide pipe is changed from 1" to 1-3/16". Moreover, by redesigning the arm section shape, precision bevel cutting is increased.



Sliding on pipe
1-3/16"

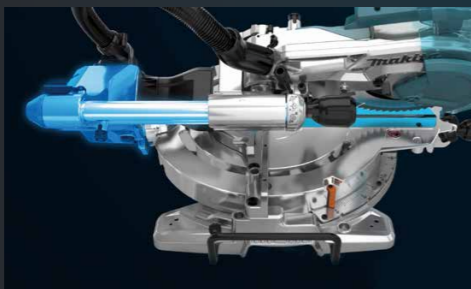

Integration of Guide fence and Lower fences provides the rigidity more than the separation structure.




Rail-forward design enables to be placed against a wall for maximizing work space

Motor head slides on fixed pipes without extending machine rear end, so the machine can be placed close to wall.

Conventional model

needed to set apart from the wall

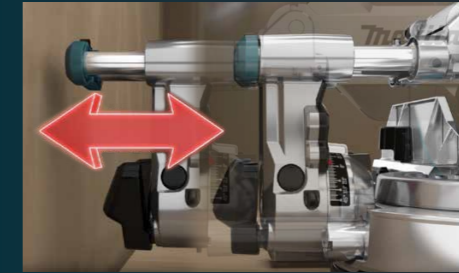


LS1019 / LS1019L

can be placed close to wall



Excellent dust collection

When cutting the low height workpiece, the dust collecting is more effective than current model because of the dual improved dust collecting port.




Large turn base

supports even large workpiece stably.

Easy-to-operate miter angle lock

Miter angle can be unlocked by turning knob counterclockwise while pushing down lock lever.

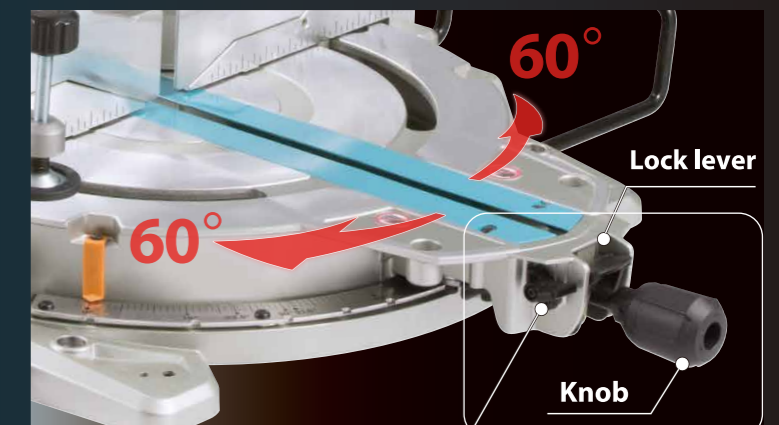

Releasing lever

Lock lever

Knob

Once Releasing lever is pushed down:

- Turn base can be moved without pushing down Lock lever.
- The turning action is smooth because positive stops are released.
- Miters 0°-60° left and right, with positive stops at 0°, 15°, 22.5°, 31.6°, 45° and 60° (left and right)