


Max. cutting capacity (height x width)



Cross Cut	Miter Cut (left & right)	Bevel Cut (left & right)	Compound Cut	Crown molding, 45 degree type	Baseboard (Skirt board)
92 x 382 (3-5/8" x 15") 107 x 363 (4-1/4" x 14-1/4")	45° left/right 92 x 268 (3-5/8" x 10-1/2") 107 x 255 (4-1/4" x 10")	45° left/right 61 x 382 (2-3/8" x 15") 71 x 363 (2-13/16" x 14-1/4")	Bevel 45° left 61 x 268 (2-3/8" x 10-1/2") Miter 45° left/right 71 x 255 (2-13/16" x 10")	Upright cutting 203 (8")	Upright cutting 171 (6-3/4")
	60° left/right 92 x 185 (3-5/8" x 7-1/4") 107 x 178 (4-1/4" x 7")	45° right 44 x 382 (1-3/4" x 15") 54 x 363 (2-1/8" x 14-1/4")	Bevel 45° right 44 x 268 (1-3/4" x 10-1/2") Miter 45° left/right 54 x 255 (2-1/8" x 10")	Horizontal cutting 320 (12-5/8")	Horizontal cutting 416 (16-3/8")

Accessories

Vertical vise assembly Part No. 126617-2  Dust bag assembly Part No. 122852-0  Stand Part No. WST06 

Horizontal vise assembly Part No. 122470-4  Stand Part No. 198688-9  Stand Part No. WST05 

Crown molding stopper set Part No. 192628-9 



12" Sliding Compound Mitre Saw

- Double Insulation
- Brake
- Constant Speed
- Soft Start
- Bevel Cutting 45 LR
- Dust Collection
- Laser Marker (LS1219L)

LS1219 / LS1219L 12" (305 mm)

	LS1219 / LS1219L
Blade Diameter	12" (305 mm)
Arbor	1" (25.4 mm)
No Load Speed	3,200 RPM
AMPS (120V)	15.0 A
Overall Dimensions	(L x W x H) 35-1/4" x 26-1/8" x 28-1/2" (898 mm x 664 mm x 725 mm)

LS1219 Standard Equipment: 12" C.T. Blade 60T (A-93712), Dust Bag (122852-0), Vertical Vise (126617-2), Triangle Rule (762001-3), Two Holder 200 (327095-1), Holder 90 (327145-2), Hex Wrench 6 (781044-6)

LS1219L Standard Equipment: 12" C.T. Blade 60T (A-93712), Dust Bag (122852-0), Vertical Vise (126617-2), Triangle Rule (762001-3), Two Holder 200 (327095-1), Holder 90 (327145-2), Hex Wrench 6 (781044-6), Hex Wrench 2.5 (783208-8)

Makita 12" Sliding Compound Mitre Saw
LS1219 / LS1219L 12" (305 mm)



Single sliding system enables smooth operation to produce superior cuts

DXT

When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca

High precision cutting




DXT

Diameter of slide pipe is changed from 25mm to 30mm. Moreover, by redesigning Arm section shape, the precision at bevel cutting is increased.



Integration of Guide fence and Lower fences provides the rigidity more than the separation structure.

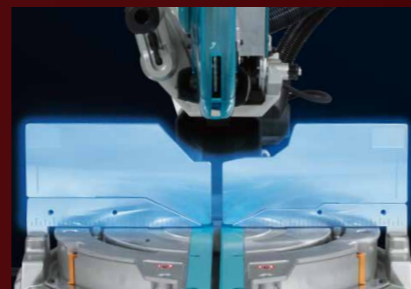


Rail-forward design enables to be placed against a wall for maximizing work space

Motor head slides on fixed pipes without extending machine rear end, so the machine can be placed close to wall.

Conventional model

needed to set apart from the wall

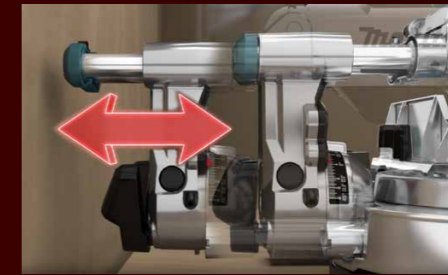

LS1219/LS1219L

can be placed close to wall



Excellent dust extraction

When cutting the low height workpiece, the dust extracting is more effective than current model because of the dual improved dust extracting port.



Large turn base

supports even large workpiece stably.

Easy-to-operate miter angle lock

Miter angle can be unlocked by turning Knob counterclockwise while pushing down Lock lever.



Once Releasing lever is pushed down:

- Turn base can be moved without pushing down Lock lever.
- The turning action is smooth because positive stops are released.
- Mitters 0°-60° left and right, with positive stops at 0°, 15°, 22.5°, 31.6°, 45° and 60° (left and right)