

Makita Red Laser Series

Cross Line
SK105DZ



Cross Line + 4 Points Laser
SK106DZ

Accessories

Laser Receiver LDG-3

TK0LDG301F
SK312GD / SK209GD



Laser Receiver LDX1

LE00855702
SK106GD / SK105GD
SK106D / SK105D



Large soft bag

832173-9
SK106GD / SK105GD
SK106D / SK105D



SK106GD
BL1021B x2
DC105B
Wall Mount
Adapter

Adapter for USB ADP05



Power supply cable

199006-4
SK312GD / SK209GD
199178-5
SK106GD / SK105GD



Hand strap set

199007-2



Min tripod

TK0LM1001F



Tripod 1800

TK0LM4001F



Tripod 2900

TK0LM5030F



Wall mount

TK000ET03F
SK312GD / SK209GD



Wall mount

Wall and ceiling adapter for universal applications with height adjustment function

LE00855706
SK106GD / SK105GD
SK106D / SK105D



Green Laser Levels

SK312GDZ / SK209GDZ

	SK312GDZ (3V/1H)	SK209GDZ (2V/1H)
Battery Capacities	12V MAX CXT Li-ion	12V MAX CXT Li-ion
Laser:	Line Beam Color : Green Output: 1 mW or less Safety Class: Class 2 Wavelength: 510 - 530 nm Line Width at 10m: 2.5 mm	Line Beam Color : Green Output: 1 mW or less Safety Class: Class 2 Wavelength: 510 - 530 nm Line Width at 10m: 2.5 mm
Accuracy:	Vertical Line Indication Range: +/- 2° 2-Vertical Line: 90° +/- 0.01° Emitted Laser: +/- 1 mm / 10 m (L x W x H w/o Protrusions)	Vertical Line Indication Range: +/- 2° 2-Vertical Line: 90° +/- 0.01° Emitted Laser: +/- 1 mm / 10 m (L x W x H w/o Protrusions)
Overall Dimensions	4-3/4" x 5-1/8" x 9" (122 mm x 130 mm x 230 mm)	4-3/4" x 5-1/8" x 9" (122 mm x 130 mm x 230 mm)

SK312GDZ Standard Equipment: Tool Only. Batteries and Charger Sold Separately.
Laser Viewing Glass (TK02100200), Shoulder Harness (TK005B0001), Storage Case (TKAK400MUN)

SK209GDZ Standard Equipment: Tool Only. Batteries and Charger Sold Separately.
Laser Viewing Glass (TK02100200), Shoulder Harness (TK005B0001), Storage Case (TKAK400MUN)

Green Cross Line Laser Levels

SK106GDZ / SK105GDZ

	SK106GDZ (Cross Line + 4 Points Laser)	SK105GDZ (Cross Line)
Battery Capacities	12V MAX CXT Li-ion	12V MAX CXT Li-ion
Laser:	Line Beam Color : Green Output: 1 mW or less Safety Class: Class 2 Wavelength: 525 nm Line Width at 10m: 2.0 mm	Line Beam Color : Green Output: 1 mW or less Safety Class: Class 2 Wavelength: 525 nm Line Width at 10m: 2.0 mm
Accuracy:	Vertical Line Indication Range: +/- 4°	Vertical Line Indication Range: +/- 4°
Overall Dimensions	+/- 3mm / 10 m (L x W x H w/o Protrusions) 5-7/16" x 2-1/2" x 4" (138 mm x 64 mm x 102 mm)	+/- 3mm / 10 m (L x W x H w/o Protrusions) 5-7/16" x 2-1/2" x 4" (138 mm x 64 mm x 102 mm)

SK106GDZ Standard Equipment: Tool Only. Batteries and Charger Sold Separately. L-Adapter (LE00854451), Green Target Plate (LE00823195), Soft Case (LE00864505)

SK105GDZ Standard Equipment: Tool Only. Batteries and Charger Sold Separately. L-Adapter (LE00855012), Green Target Plate (LE00823195), Soft Case (LE00864505)



Green Laser Levels SK312GDZ / SK209GDZ SK106GDZ / SK105GDZ

High brightness green laser for increased visibility at bright site



Rechargeable Green Multi Line Laser

Horizontal / 3-Vertical lines

SK312GD



Horizontal / 2-Vertical lines

SK209GD



Rechargeable Green Cross Line Laser

Cross line + Point

SK106GD



Cross line

SK105GD



When QUALITY & SERVICE COUNTS – Choose Makita

makita.ca



12V max Lithium-ion Battery




Green Laser Series

Powered by the following 12V max slide CXT Li-ion batteries

1.5Ah : BL1016, 2.0Ah : BL1021B, 4.0Ah : BL1041B



SK312GD / SK209GD

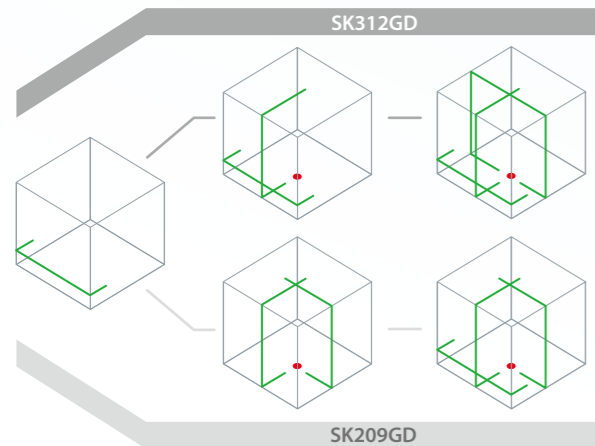

Long continuous operation

*at max output

SK312GD / SK209GD

10 / 15h

BL1016
1.5Ah

14 / 20h

BL1021B
2.0Ah


28 / 40h

BL1041B
4.0Ah

Large handle
prevents the tool from falling.

Adjustment screw leg
Horizontal line can be adjusted at any places

Leveling accuracy
±1mm / 10m

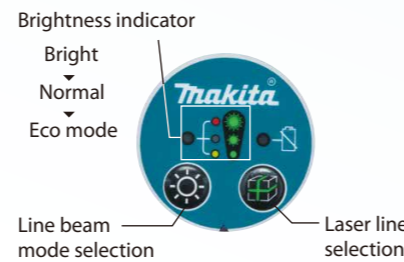

Line beam mode memory

When the power is turned ON, the laser beam mode will be the same mode as the last time turned OFF.

Fine adjustment knob
fine-adjusted from either side by turning fine-adjustment knob

XPT


Extreme Protection Technology

For use in outdoor applications or harsh environments, protection from dust and dripping water is enhanced.

SK106GD / SK105GD

SK106GD / SK105GD

with point (SK106GD only)

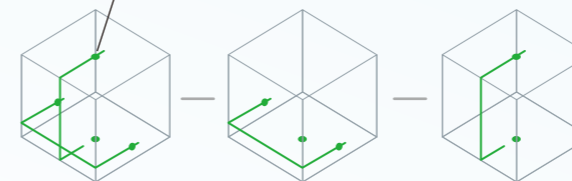

Long continuous operation

*at max output

SK106GD / SK105GD

7 / 7h


BL1016
1.5Ah

10 / 10h

BL1021B
2.0Ah

20 / 20h

BL1041B
4.0Ah

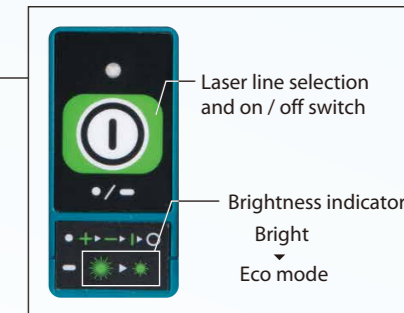

Adapter with magnet

for SK105GD / SK105D



for SK106GD / SK106D



Leveling accuracy
±3mm / 10m

SK312GD / SK209GD

Shock absorbing construction
prevents the tool from vibration during transport




Aluminum carrying case



ALL PRODUCTS

High brightness green laser


for increased visibility at bright site

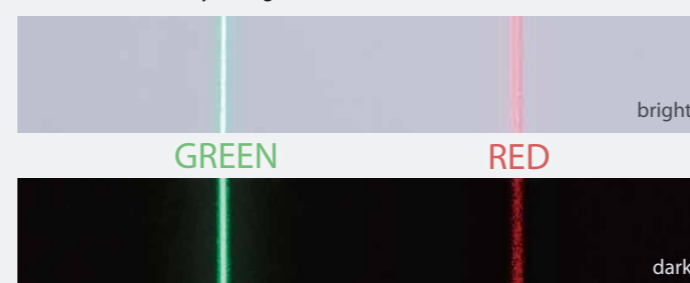

SK106GD / SK105GD

Pendulum lock

Pendulum lock enables slope incline applications for increased versatility



Lock switch

Soft bag

